

MAIN CHARACTERISTICS

I_D	111A
V_{DS}	800V
$R_{os(on)-Typ@ V_{gs}=18V}$	23mΩ

FEATURES

- High Speed Switching
- High Blocking Voltage with Low $R_{DS(on)}$
- Easy to Parallel
- Simple to Drive
- RoHS Compliant

Benefits

- Increased Power Density
- Faster Operating Frequency
- Reduction of Heat Sink Requirements
- Higher Efficiency
- Reduced EMI

APPLICATIONS



- Power Factor Correction Modules
- Switch Mode Power Supplies
- DC-AC Inverters
- High Voltage DC/DC Converters

MECHANICAL DATA

- Case: Molded plastic
- Mounting Position: Any
- Molded Plastic: UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum, 10s per JESD 22-B106

Product specification classification

Part Number	Package	Mode Name	Pack
LSC025M65B4	TO-247-4L	LSC025M65B4	Tube



TO-247-4

引脚功能

- 1.漏极(D)
- 2.主源极(S)
- 3.开尔文源极(KS)
- 4.栅极(G)

Maximum Ratings at Tc=25°C unless otherwise specified

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	800	V
Gate-Source Voltage	V_{GS}	-8/+22	V
Recommended Operation Value	V_{GSop}	-4/+18	V
Continue Drain Current Tc=25°C	I_D	111	A
Continue Drain Current Tc=100°C		79	
Pulsed Drain Current	I_{DM}	230	A
Power Dissipation TC=25°C	P_D	357	W
Power Dissipation TC=100°C		178	
Operating Temperature Range	T_J	-40 to +175	°C
Storage Temperature Range	T_{STG}	-40 to +175	°C
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.42	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	26.8	°C/W

Note1:Pulse test: 300 μ s pulse width, 2 % duty cycle

Electrical Characteristics at Tc=25°C unless otherwise specified

Parameter	Test Condition	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 100 \mu\text{A}$	BV_{DSS}	800	-	-	V
Drain-Source Leakage Current	$V_{DS} = 800 \text{ V}, V_{GS} = 0 \text{ V}$	I_{DSS}	-	1	-	μA
Gate Leakage Current	$V_{GS} = 18 \text{ V}, V_{DS} = 0 \text{ V}$	I_{GSS}	-	-	250	nA
Short-Circuit Withstand Time	$V_{DD}=400\text{V}, V_{GS}=18\text{V}, V_{DS,peak}<650\text{V}$	TSC	-	2.5	-	μs
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 10 \text{ mA}$	$V_{GS(th)}$	2	2.7	4	V
	$V_{DS} = V_{GS}, I_D = 10 \text{ mA}$ $T_J = 175^\circ\text{C}$		-	2	-	V
Drain-Source On-State Resistance	$V_{GS} = 18 \text{ V}, I_D = 40 \text{ A}$	$R_{DS(on)}$	-	23	31	$\text{m}\Omega$
	$V_{GS} = 18 \text{ V}, I_D = 40 \text{ A}, T_J = 175^\circ\text{C}$		-	47	-	$\text{m}\Omega$
Internal Gate Resistance	$f=1\text{MHz}$	$R_{G(int)}$	-	1.6	-	Ω
Input Capacitance	$V_{DS}=600\text{V}, V_{GS}=0\text{V}, f=100\text{kHz}$	C_{iss}	-	2162	-	pF
Output Capacitance		C_{oss}	-	195	-	pF
Reverse Transfer Capacitance		C_{rss}	-	14	-	pF
Coss Stored Energy		E_{oss}	-	40	-	μJ
Total Gate Charge(Note2)	$I_D = 33.5\text{A}, V_{DD} = 400\text{V}, V_{GS} = -4/+18 \text{ V}$	Q_G	-	100	-	nC
Gate to Source Charge(Note2)		Q_{GS}	-	25	-	nC
Gate to Drain Charge(Note2)		Q_{GD}	-	28	-	nC

Electrical Characteristics at Tc=25°C unless otherwise specified

Turn-on Switching Energy	$V_{DD}=400\text{V}, I_D=33.5\text{A}, V_{GS}=-4\text{V}/18\text{V}, R_{G(ext)}=2.5\Omega, L=103\mu\text{H}, T_J=25^\circ\text{C}$	E_{on}	-	63	-	μJ
Turn-off Switching Energy		E_{off}	-	31	-	μJ
Turn-on Delay Time(Note2)		$t_{d(ON)}$	-	12	-	ns
Rise Time(Note2)		t_r	-	14	-	ns
Turn-Off Delay Time(Note2)		$t_{d(OFF)}$	-	25	-	ns
Fall Time(Note2)		t_f	-	8	-	ns

Source-Drain Diode Characteristics at Ta=25°C unless otherwise specified

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Maximun Body-Diode Continuous Current	VGS = -4 V, Tc=25°C	I _S	-	79	-	A
	VGS = -4 V, Tc=100°C		-	45	-	A
Maximun Body-Diode Pulsed Current(Note2)		I _{SM}	-	230	-	A
Drain-Source Diode Forward Voltage	VGS = -4 V, I _{SD} = 16.8 A	V _{SD}	-	3.8		V
	VGS = -4 V, I _{SD} =16.8A, Tj=175°C		-	3.4	-	V
Reverse Recovery Time(Note2)	VGS = -4 V, I _{SD} =33.5 A,	trr	-	19	-	ns
Reverse Recovery Charge(Note2)	V _R =400V, dIF/dt =1862A/μs,	Qrr	-	230	-	nC
Peak Reverse Recovery Current	s,	Irrm	-	22.2	-	A

Note2:Pulse test: 300 μs pulse width, 2 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

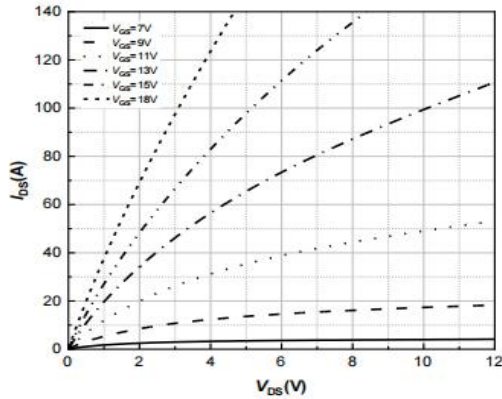


Figure 1. Output Characteristics
 $T_j = -40^\circ\text{C}$

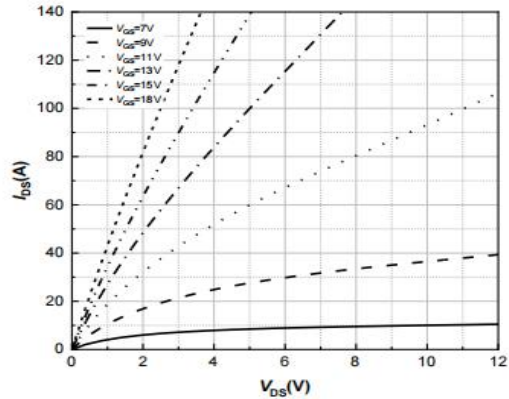


Figure 2. Output Characteristics
 $T_j = 25^\circ\text{C}$

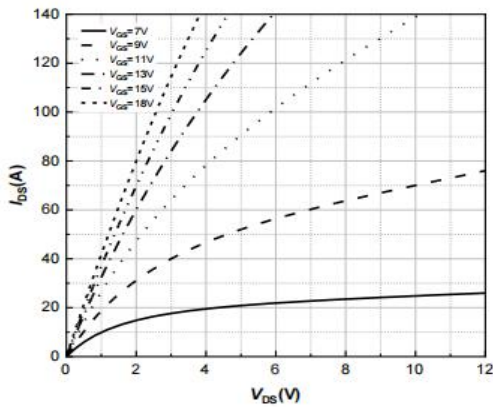


Figure 3. Output Characteristics
 $T_j = 175^\circ\text{C}$

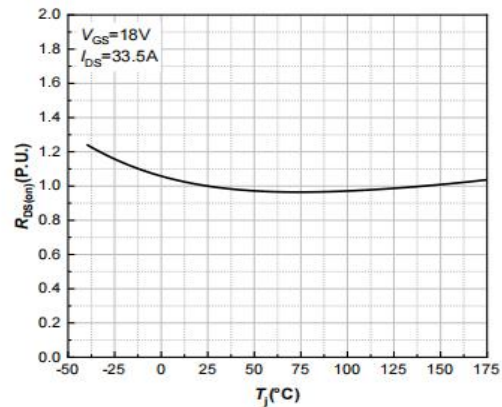


Figure 4. Normalized On-Resistance vs. Temperature

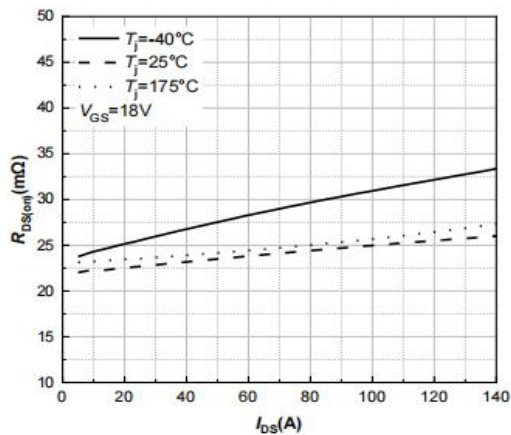


Figure 5. On-Resistance vs. Drain Current
For Various Temperatures

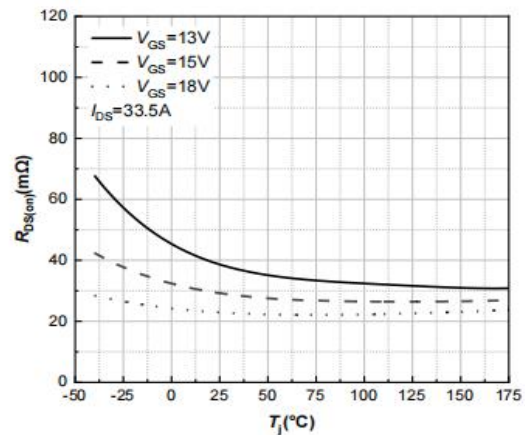


Figure 6. On-Resistance vs. Temperature
For Various Gate Voltage

RATINGS AND CHARACTERISTIC CURVES

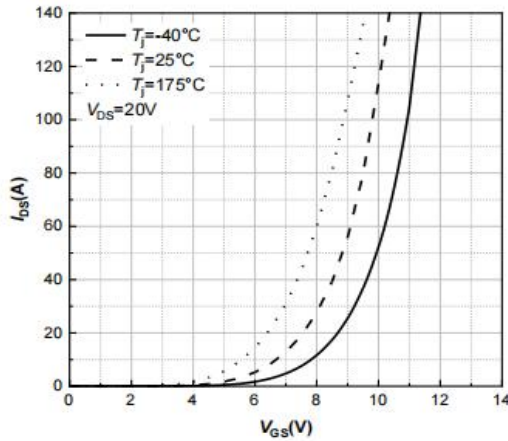


Figure 7. Transfer Characteristic for

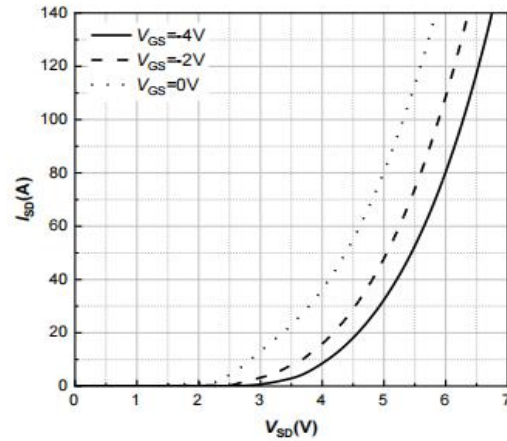


Figure 8. Body Diode Characteristic

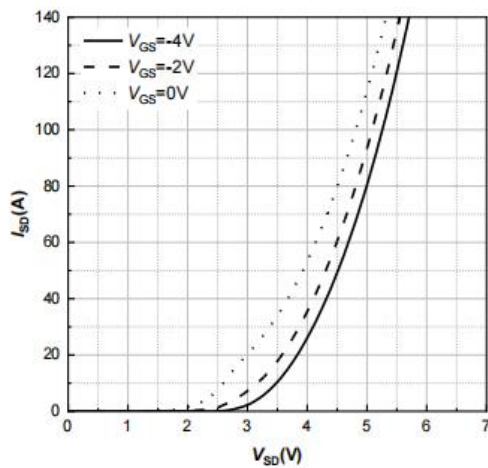


Figure 9. Body Diode Characteristic
 $T_J = 25^\circ\text{C}$

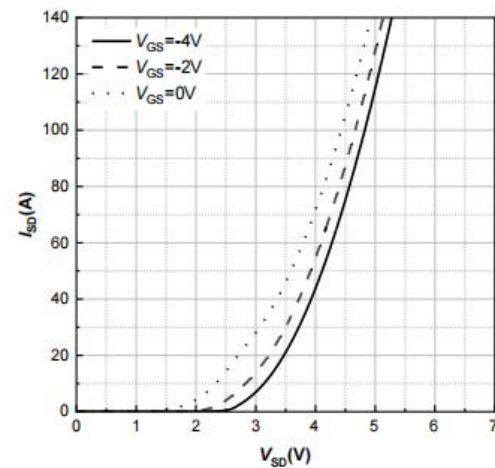


Figure 10. Body Diode Characteristic
 $T_J = 175^\circ\text{C}$

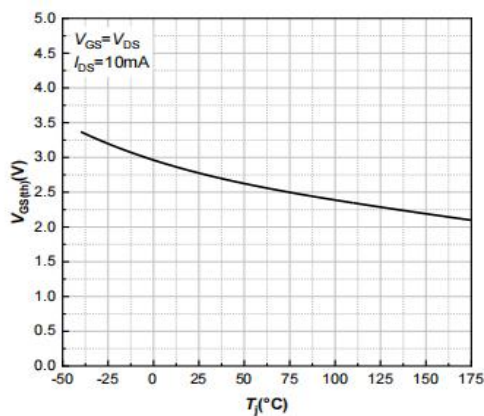


Figure 11. Threshold Voltage vs.
Temperature

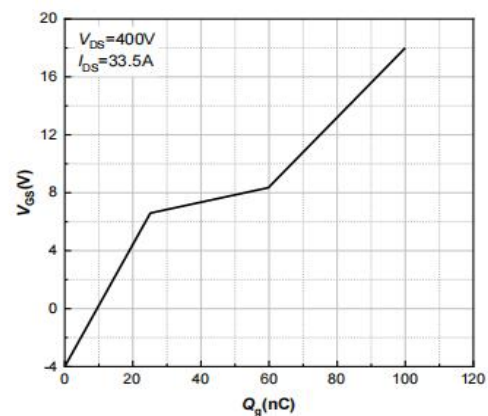


Figure 12. Gate Charge Characteristics

RATINGS AND CHARACTERISTIC CURVES

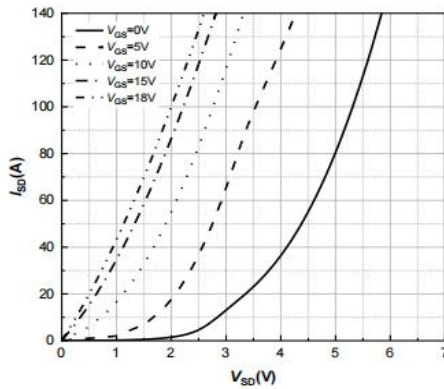


Figure 13. 3rd Quadrant Characteristic
 $T_j = -40^\circ\text{C}$

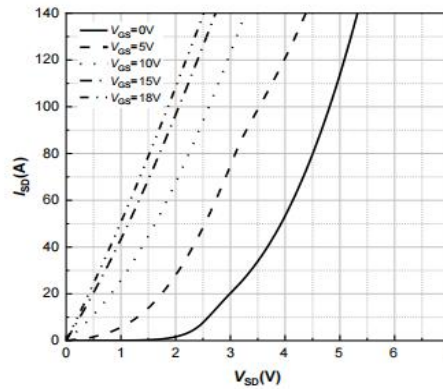


Figure 14. 3rd Quadrant Characteristic
 $T_j = 25^\circ\text{C}$

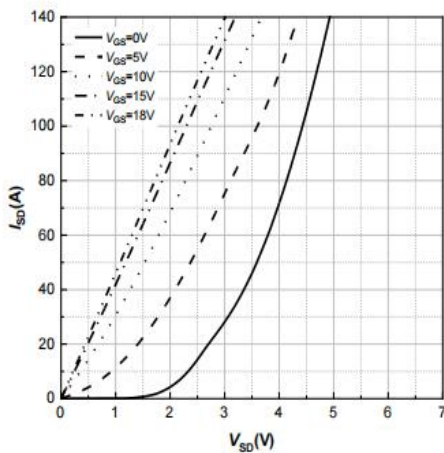


Figure 15. 3rd Quadrant Characteristic
 $T_j = 175^\circ\text{C}$

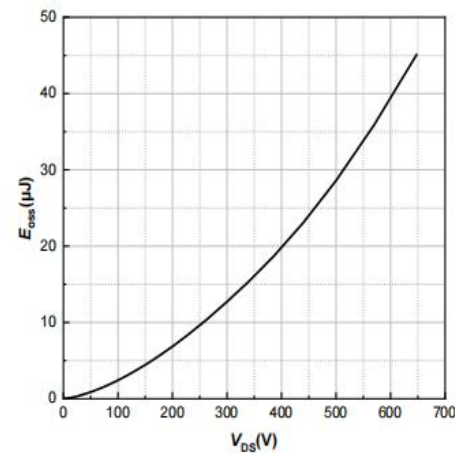


Figure 16. Output Capacitor Stored Energy

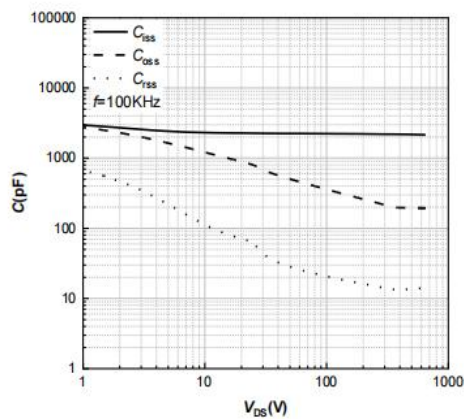


Figure 17. Capacitances vs. Drain-Source

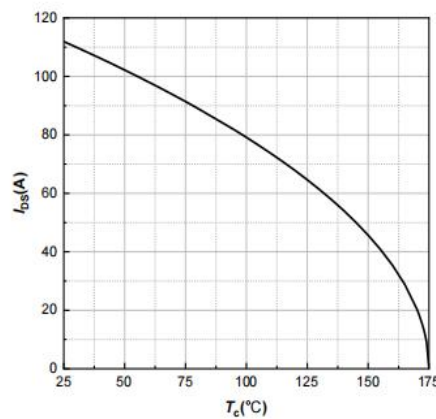


Figure 18. Continuous Drain Current
Derating vs. Case Temperature

RATINGS AND CHARACTERISTIC CURVES

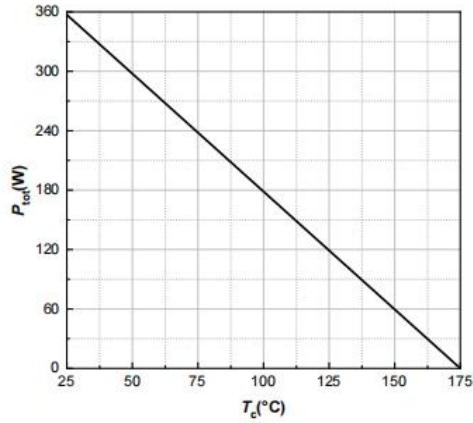


Figure 19. Maximum Power Dissipation Derating vs. Case Temperature

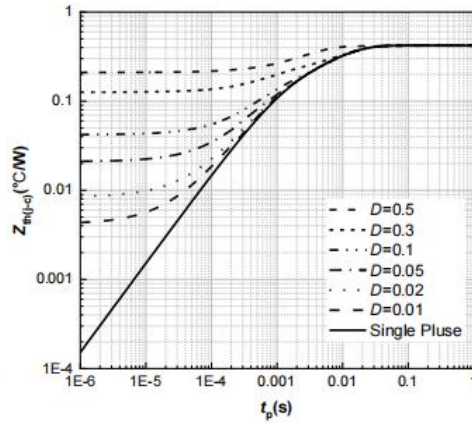


Figure 20. Transient Thermal Impedance

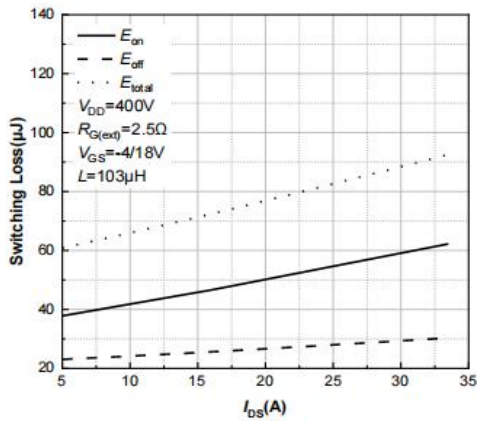


Figure 21. Clamped Inductive Switching Energy vs. Drain Current
 $T_j = 25^\circ\text{C}$

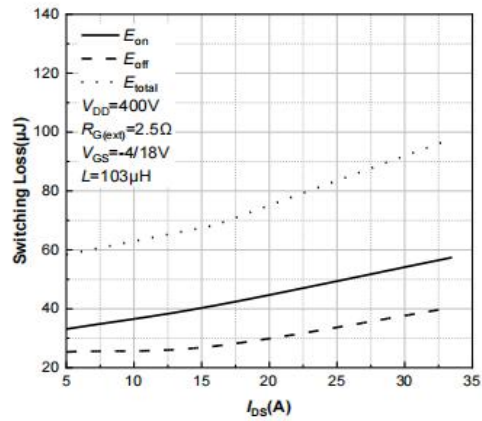


Figure 22. Clamped Inductive Switching Energy vs. Drain Current
 $T_j = 175^\circ\text{C}$

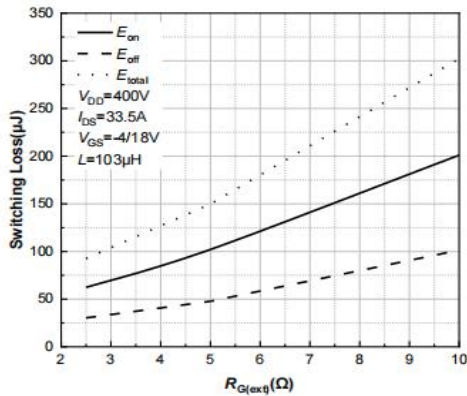


Figure 23. Clamped Inductive Switching Energy vs. $R_{G(\text{ext})}$
 $T_j = 25^\circ\text{C}$


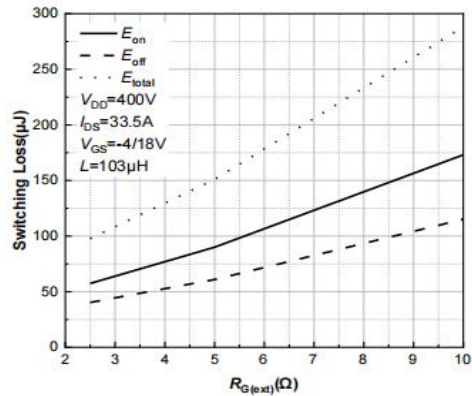



Figure 24. Clamped Inductive Switching Energy vs. $R_{G(\text{ext})}$
 $T_j = 175^\circ\text{C}$

Package Outline Dimensions millimeters


TO-247-4L

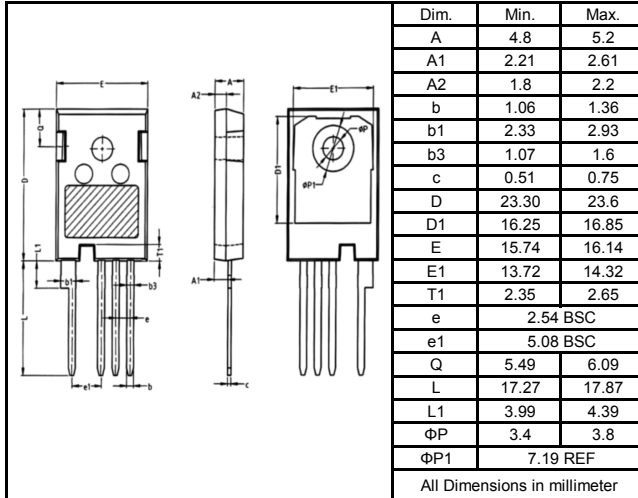

Marking on the body

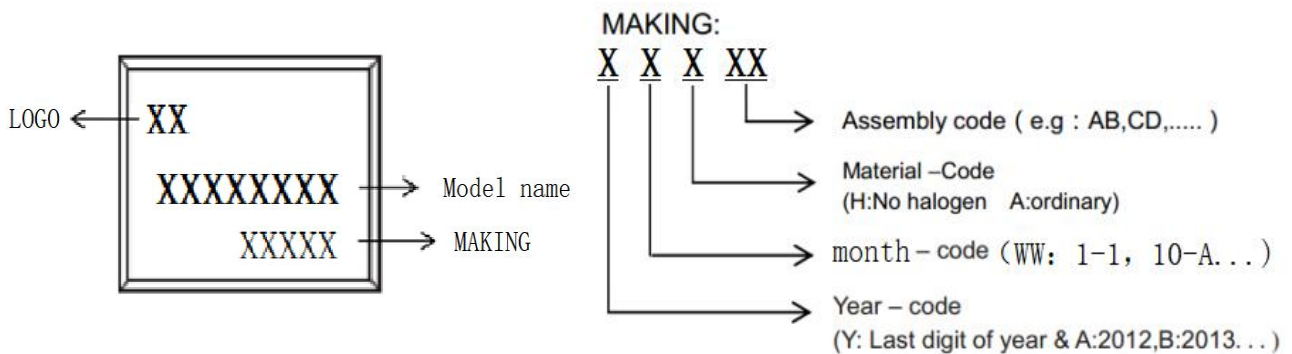

packing instruction

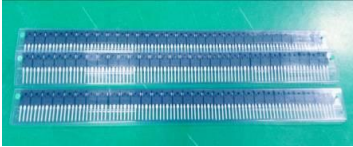PKG	Minimal Package	Box	Carton
TO-247-4-4L			
	30pcs/pdpe	600pcs/box	3000pcs/box

Notice

All product, product specifications and data are subject to change without notice to improve. The right to explain is owned by LINGXUN electronics company.

Confirm that operation temperature is within the specified range described in the product specification. Avoid applying power exceeding normal rated

power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

LINGXUN electronics shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

<http://www.lxmicro.com>

Revision History

Rev	Changes	Date
2.0	First version	2026/5/27