




ULTRA LOW VF SCHOTTKY RECTIFIER


TO-220AB/CT




TO-220F/FCT



TO-263/DC



TO-262/CR


FEATURES

- Ultra low forward voltage
- High current capability
- High forward surge capability
- Low power losses, High efficiency
- Guarding for over voltage protection


RoHS
 COMPLIANT

APPLICATIONS

Low VF Schottky barrier rectifier are designed for high frequency, miniature switched mode power supplies such as adapters ,lighting and on-board DC/DC conerters

Primary Characteristic

I_O	2*20A
V_{RRM}	100V
I_{FSM}	360A
V_F	0.64V
T_{Jmax}	150℃

MECHANICAL DATA

- **Case:** Molded plastic
- **Polarity:** As marked
- **Mounting Position:** Any
- **Molded Plastic:** UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275℃ maximum,10s per JESD 22-B106

Maximum Ratings at Ta=25℃ unless otherwise specified

Characteristics	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	V
Working Peak Reverse Voltage	V_{RWM}	100	V
Maximum DC Blocking Voltage	V_{DC}	100	V
Maximum Average Forward Rectified Current	I_O	20	A
		40	
Peak Forward Surge Current,8.3 ms Single Half Sine-	I_{FSM}	360	A
Operating Temperature Range	T_J	-40 to +150	℃
Storage Temperature Range	T_{STG}	-40 to +150	℃
Typical Thermal Resistance (Note1)	$R_{\theta JC}$	2	℃/W
TO-220AB,TO-263,TO-262			
TO-220F			

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.

Electrical Characteristics unless otherwise specified

Characteristics		Symbol	Value		Unit
Forward Voltage Drop(Note2)		V _F	Typ.	Max.	V
at I _F =10A	TA=25°C		0.54	-	
	TA=125°C		0.50	-	
at I _F =15A	TA=25°C		0.61	-	
	TA=125°C		0.58	-	
at I _F =20A	TA=25°C		0.67	0.75	
	TA=125°C		0.64	-	

Maximum Reverse Current at $V_R=100V$	$T_A=25^{\circ}C$	I_R	11	50	μA
	$T_A=125^{\circ}C$		2	-	mA

Note2:Pulse test: 300 μs pulse width, 1 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

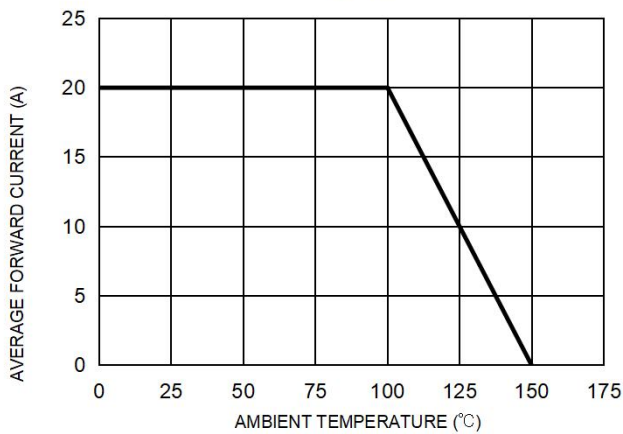


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

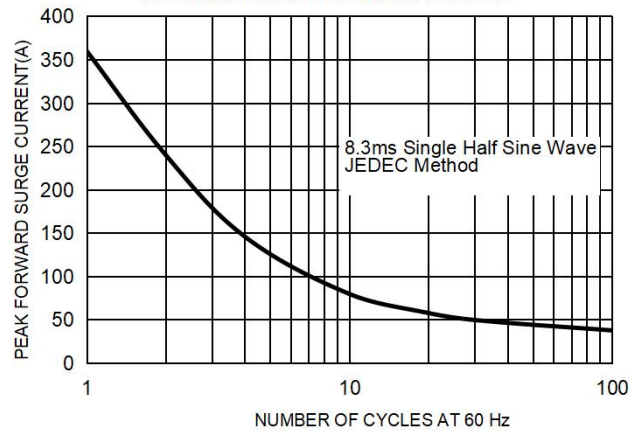


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG



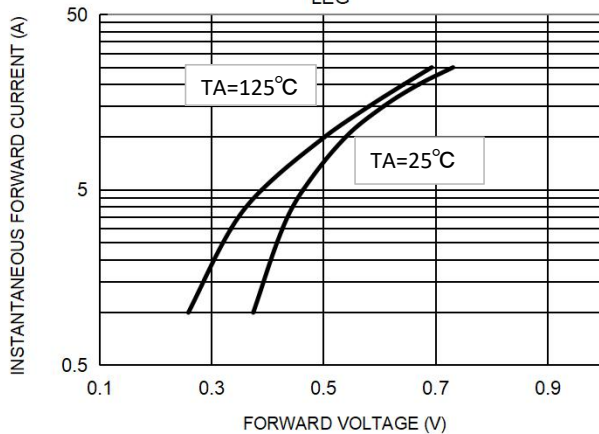


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

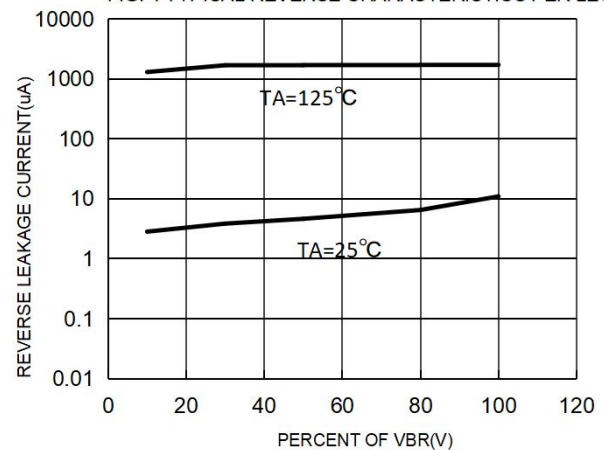


Package Outline Dimensions millimeters

TO-220AB

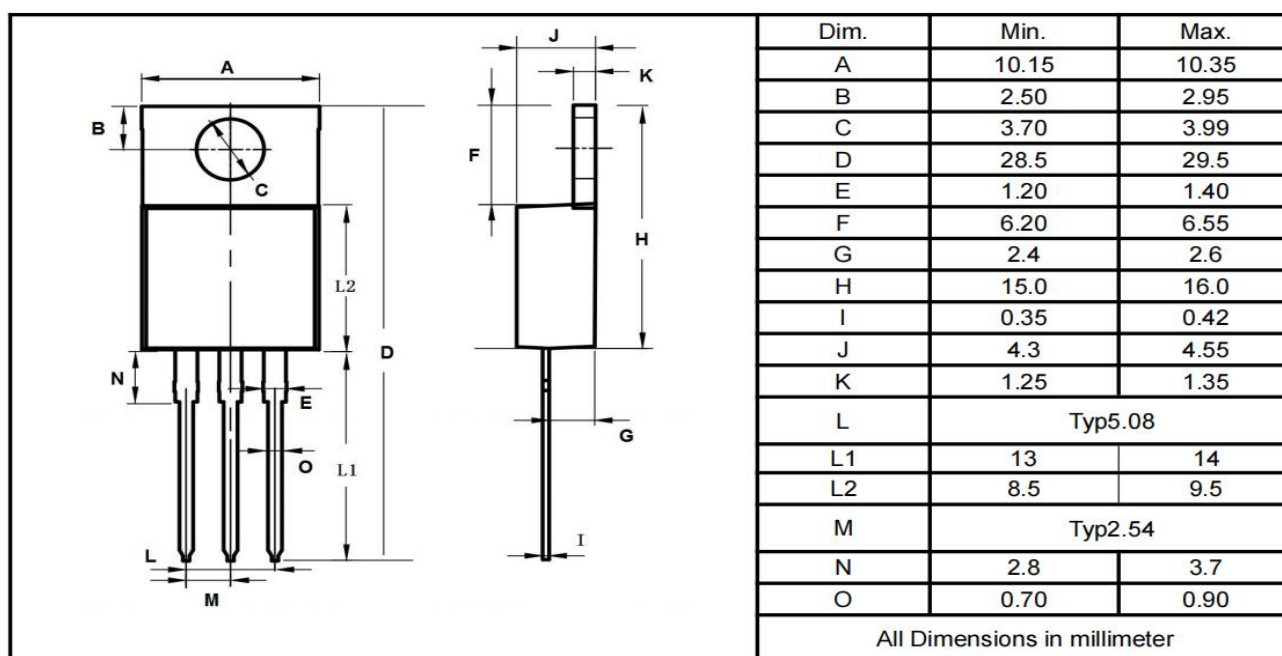


TO-220F

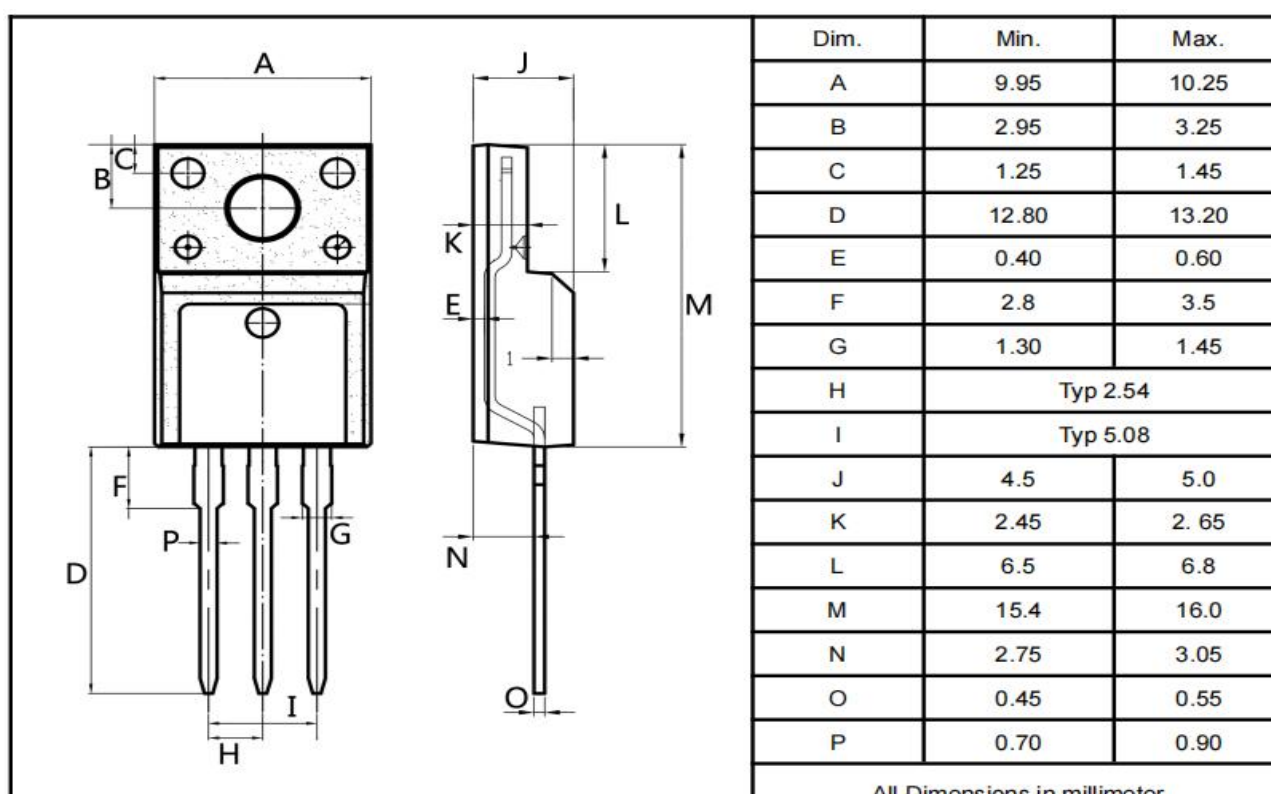


Package Outline Dimensions millimeters


TO-263

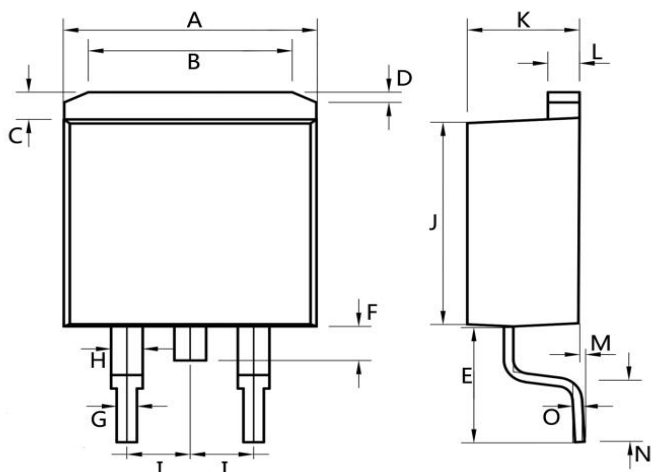	Dim.	Min.	Max.
	A	10.10	10.35
	B	6	8
	C	1.2	1.5
	D	0.55	1.0
	E	4.3	5.3
	F	1.4	1.6
	G	0.75	0.85
	H	1.2	1.5
	I	Typ2.54	
	J	8.5	9.5
	K	4.3	4.55
	L	1.25	1.35
	M	0.02	0.23
	N	2.2	2.8
	O	0.3	0.4
All Dimensions in millimeter			

TO-262

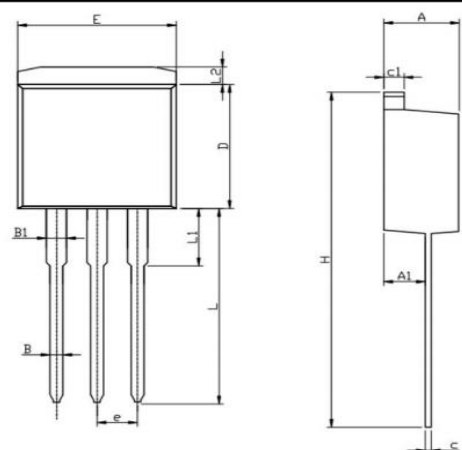	Dim.	Min.	Max.
	A	4.4	4.6
	A1	2.4	2.6
	B	0.75	0.85
	B1	1.2	1.4
	C	0.35	0.42
	C1	1.25	1.35
	D	8.5	9.5
	E	10.15	10.35
	H	23	25
	L	13	14
	L1	2.8	3.5
	L2	1.2	1.5
All Dimensions in millimeter			

Marking on the body


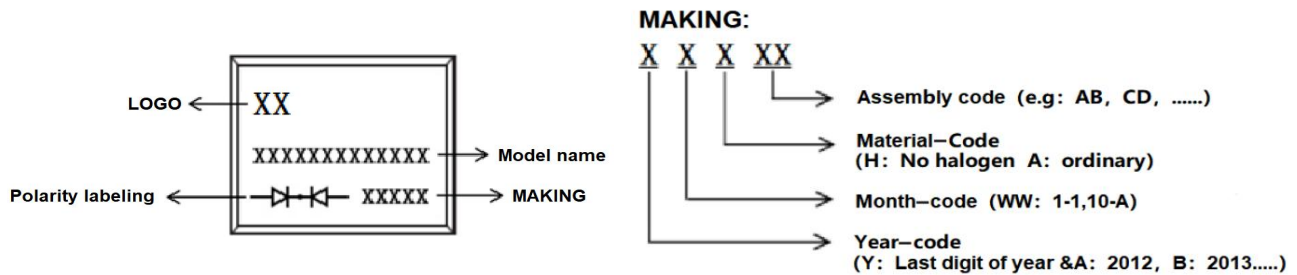


Ordering information

Part Number	Package	Base Quantity	Delivery mode
SBT40U100CT	TO-220AB	50 pcs / tube	1000pcs/box 5000pcs/carton
SBT40U100FCT	TO-220F	50 pcs / tube	1000pcs/box 5000pcs/carton
SBT40U100DC	TO-263	50 pcs / tube	1000pcs/box 5000pcs/carton
SBT40U100DC-R	TO-263	800 pcs / reel	1600pcs/box 8000pcs/carton
SBT40U100CR	TO-262	50 pcs / tube	1000pcs/box 5000pcs/carton

Note: For Halogen Free molding compound, add "H" suffix to part number above.

packing instruction

PKG	最小包装	内盒	外箱
TO-220AB TO-220F TO-263 TO-262			
	50pcs/管	1000pcs/盒	5000pcs/箱
TO-263-R			
	800pcs/盘	1600pcs/盒	8000pcs/箱

Notice

1. All product, product specifications and data are subject to change without notice to improve. The right to explain is owned by LINGXUN electronics company.

2. Confirm that operation temperature is within the specified range described in the product specification. Avoid applying power exceeding normal rated power;

exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

3. LINGXUN electronics shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.