




ULTRAFAST RECOVERY RECTIFIERS



TO-220AB/CT




TO-220F/FCT




TO-263/DC



TO-252/CS



TO-251/D



FEATURES

- High speed switching capability
- High current capability
- High forward surge capability
- Low power losses, High efficiency
- High reliability
- For use in low voltage, high frequency inverters



RoHS
COMPLIANT

APPLICATIONS

Fast recovery diode, mainly used for rectification, used in high-power equipment, The express and ultrafast recovery diodes are suitable for high frequency and ultra high frequency circuits, respectively

Primary Characteristic

I_O	2*8A
V_{RRM}	400V
I_{FSM}	150A
V_F	1.02V
T_{rr}	31ns
T_{jmax}	175°C

MECHANICAL DATA

- **Case:** Molded plastic
- **Polarity:** As marked
- **Mounting Position:** Any
- **Molded Plastic:** UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum, 10s per JESD 22-B106

Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

Characteristics	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	400	V
Working Peak Reverse Voltage	V_{RWM}	400	V
Maximum DC Blocking Voltage	V_{DC}	400	V
Maximum Average Forward Rectified Current	Per Leg	8	A
	Total	16	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150	A
Operating Temperature Range	T_J	175	°C
Storage Temperature Range	T_{STG}	-55 to +175	°C
Typical Thermal Resistance (Note1)	$R_{\theta JC}$	2	°C/W
TO-220AB, TO-263, TO-252, TO-251		4	
TO-220F			

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.





Electrical Characteristics (Per Leg) unless otherwise specified

Characteristics		Symbol	Value		Unit
Forward Voltage Drop(Note2)		V _F	Typ.	Max.	V
at I _F =3A	TA=25°C		0.97	-	
	TA=125°C		0.84	-	
at I _F =5A	TA=25°C		1.04	-	
	TA=125°C		0.93	-	
at I _F =8A	TA=25°C		1.12	1.30	
	TA=125°C		1.02	-	

Maximum Reverse Current at $V_R=400V$	TA=25°C	I_R	0.01	5	μA
	TA=125°C		3	-	μA
Maximum Reverse Recovery Time at $I_F=0.5A$, $I_R=1A$,		T_{rr}	31	35	ns


Note2:Pulse test: 300 μs pulse width, 1 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

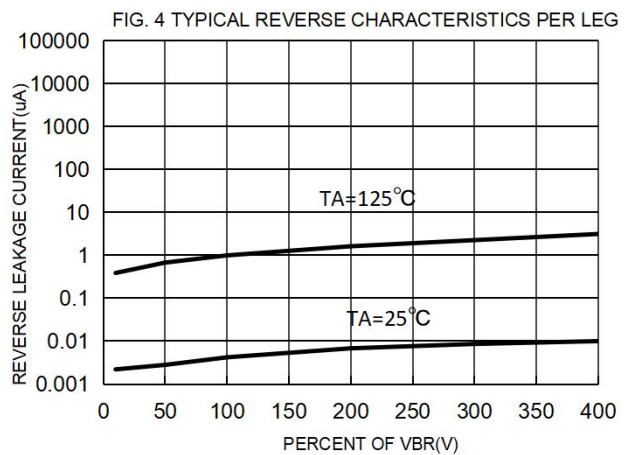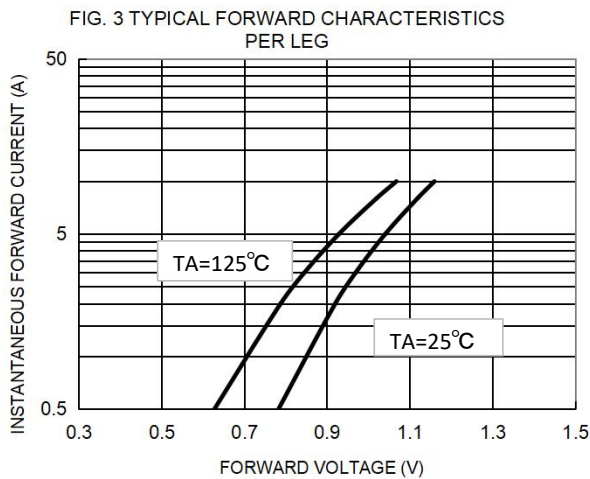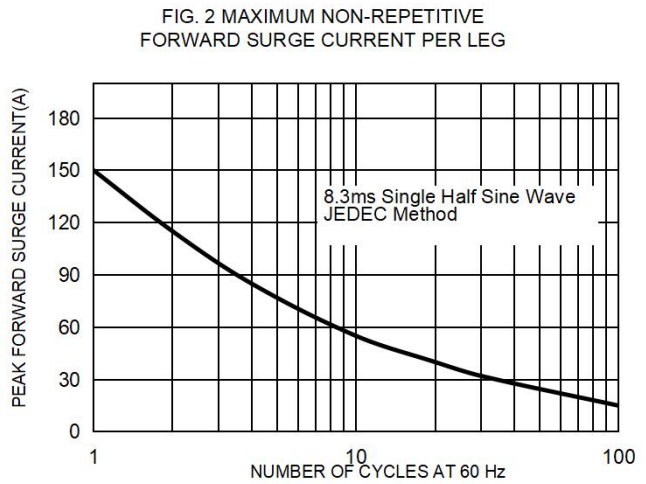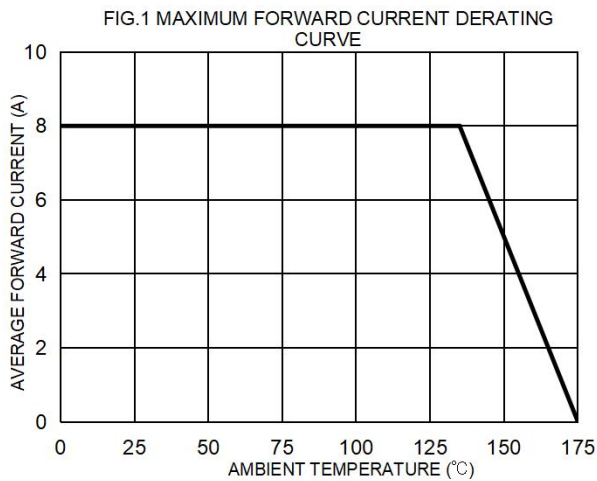


Package Outline Dimensions millimeters

TO-220AB

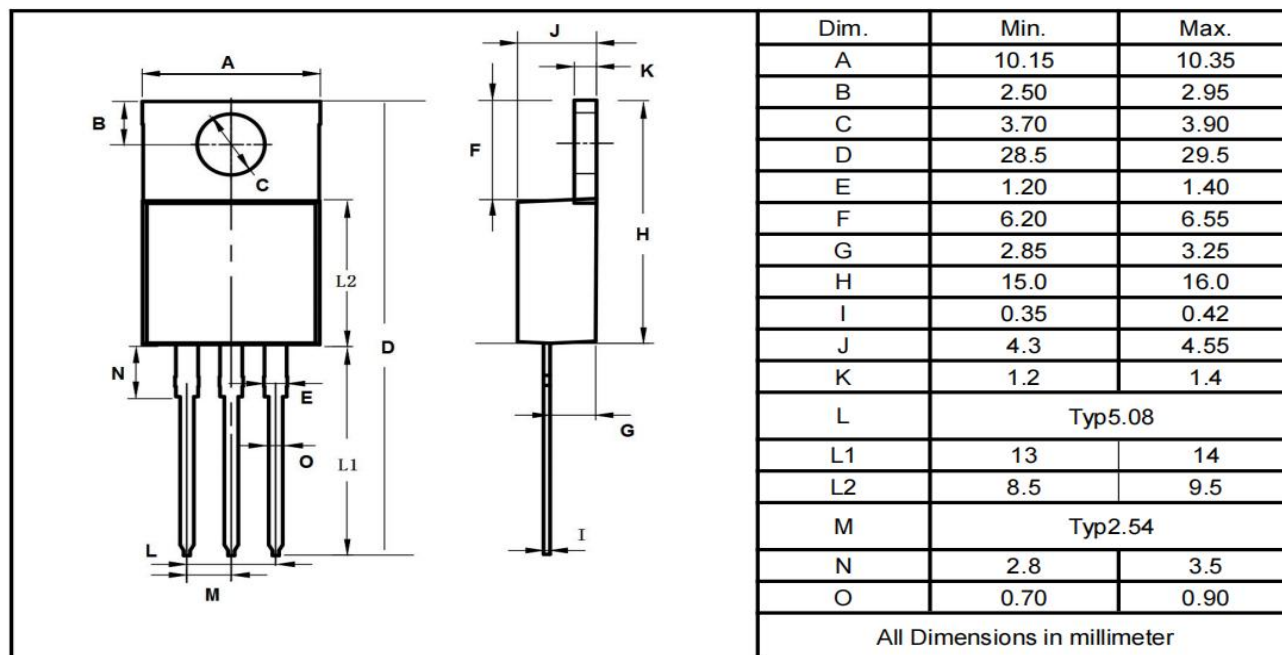

TO-220F

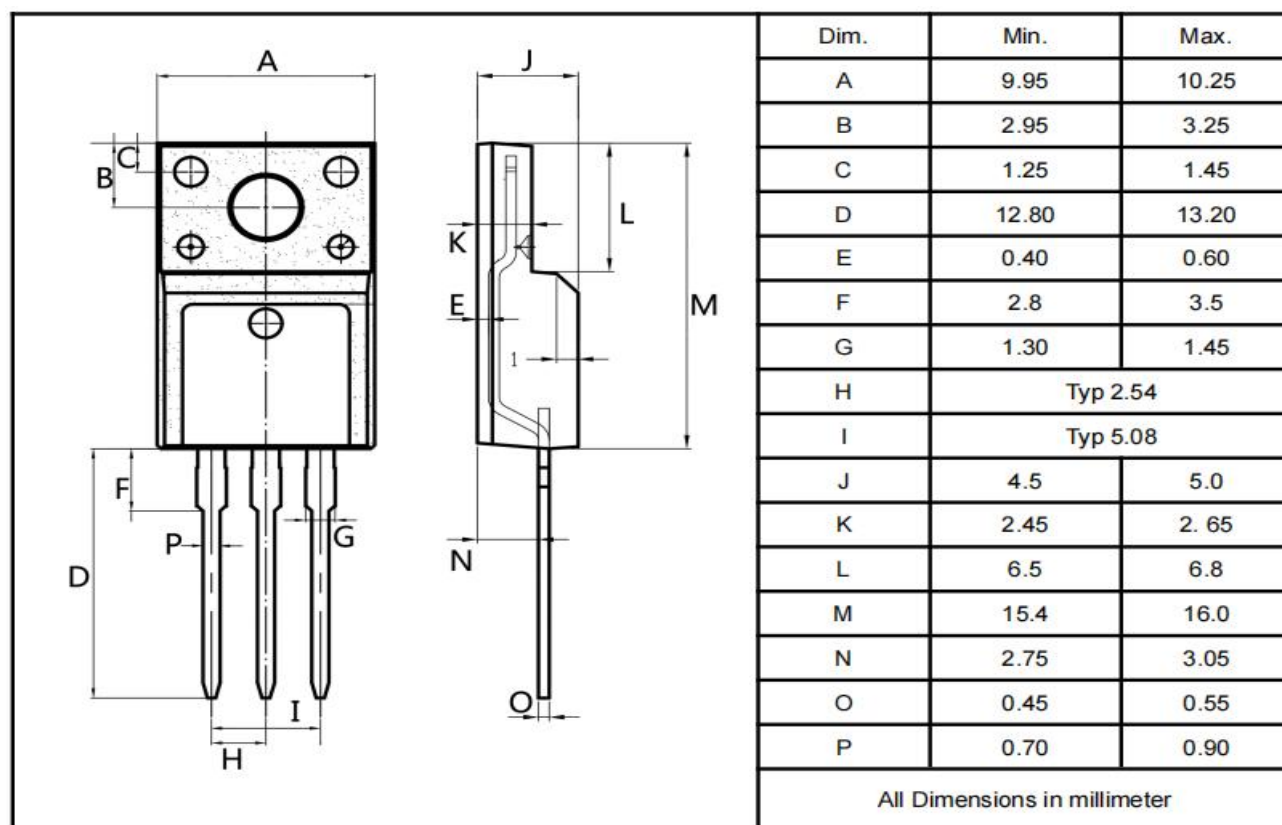

Package Outline Dimensions millimeters

T0-263

The image shows a technical drawing of a T0-263 package. The top view (left) shows a rectangular body with a central square area. Dimensions A and B are the overall width and the width of the central square, respectively. C is the thickness of the top layer. D is the thickness of the top flange. F is the thickness of the bottom flange. G and H are the widths of the two central pins. I is the distance between the pins. The side view (right) shows the profile of the package. J is the total height. K is the width of the top flange. L is the thickness of the top flange. E is the height of the main body. M is the thickness of the bottom flange. N is the thickness of the bottom flange. O is the radius of the bottom flange.

Dim.	Min.	Max.
A	10.10	10.35
B	6	8
C	1.2	1.5
D	0.55	1.0
E	4.3	5.3
F	1.4	1.6
G	0.75	0.85
H	1.2	1.5
I	Typ2.54	
J	8.5	9.5
K	4.3	4.55
L	1.25	1.35
M	0.02	0.23
N	2.2	2.8
O	0.3	0.4

All Dimensions in millimeter

T0-252


Technical drawing of a T0-252 package showing three views: top, side, and front.

- Top View:** Shows the package footprint with dimensions D (total width), D1 (width of the central pad), B (width of the side pads), E (total length), E1 (length of the central pad), E2 (length of the side pads), and A1 (width of the mounting tabs).
- Side View:** Shows the package profile with dimensions C (height of the central pad), A (height of the side pads), L1 (total height), L2 (height of the central pad), L3 (height of the side pads), and O (offset of the side pads).
- Front View:** Shows the package from the front with dimensions B1 (width of the central pad), B2 (width of the side pads), and E1 (length of the central pad).


Dim.	Min.	Max.
A	2.1	2.5
A1	6.3	6.9
B	0.95	1.55
B1	0.6	0.8
B2	0.75	0.95
C	Typ0.5	
D	5.3	5.5
D1	3.65	4.05
E	5.8	6.4
E1	Typ2.3	
E2	Typ4.6	
O	0	0.15
L1	9	11
L2	Typ1.5	
L3	0.7	1.0
All Dimensions in millimeter		

Package Outline Dimensions millimeters

T0-251

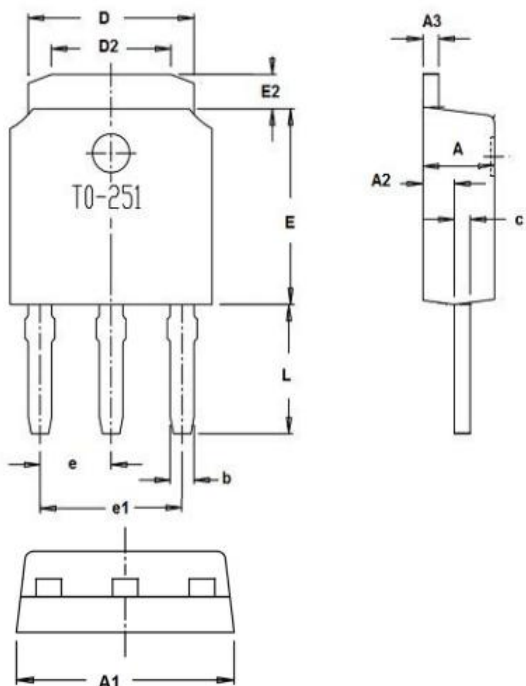	Dim.	Min.	Max.
	A	2.1	2.5
	A1	6.3	6.9
	A2	0.9	1.1
	A3	Typ0.5	
	b	0.6	0.8
	c	0.4	0.5
	D	5.3	5.5
	D2	3.65	4.05
	E	5.8	6.4
	E2	0.9	1.4
	e	Typ2.29	
	e1	Typ4.58	
	L	3.7	4.3
All Dimensions in millimeter			

Marking on the body



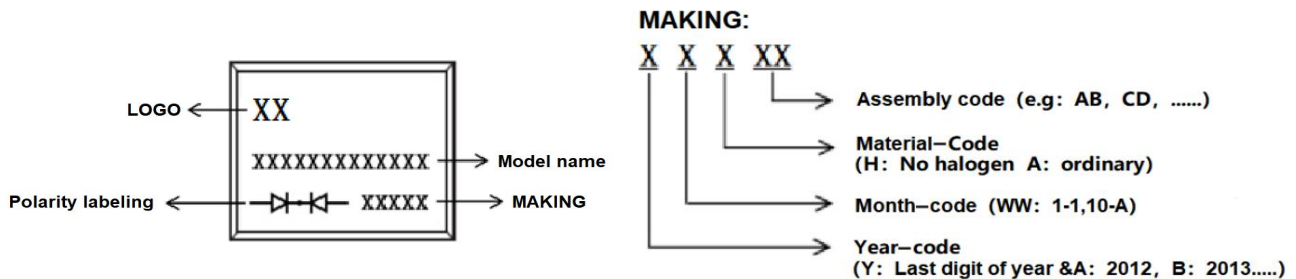


Ordering information

Part Number	Package	Unit Weight	Base Quantity	Delivery mode
MUR1640CT	TO-220AB	0.07oz(1.96g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MUR1640FCT	TO-220F	0.06oz(1.74g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MUR1640DC	TO-263	0.04oz(1.16g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MUR1640DC-R	TO-263	0.04oz(1.16g)	800 pcs / reel	1600pcs/box 8000pcs/carton
MUR1640CS	TO-252	0.04oz(1.16g)	2500 pcs / reel	5000pcs/box 25000pcs/carton
MUR1640D	TO-251	0.011oz(0.32g)	80 pcs / tube	4000pcs/box 24000pcs/carton

Note: For Halogen Free molding compound, add "H" suffix to part number above.

packing instruction

PKG	最小包装	内盒	外箱
TO-220AB TO-220F TO-263			
	50pcs/管	1000pcs/盒	5000pcs/箱
TO-263-R			
	800pcs/盘	1600pcs/盒	8000pcs/箱
TO-252			
	2500pcs/盘	5000pcs/盘	25000pcs/箱
TO-251			
	80pcs/管	4000pcs/盒	24000pvs/箱

Notice

1. All product, product specifications and data are subject to change without notice to improve. The right to explain is owned by LINGXUN electronics company.

2. Confirm that operation temperature is within the specified range described in the product specification. Avoid applying power exceeding normal rated power;

exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

3. LINGXUN electronics shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.